




APart PA-CONF CONFERENCE MICROPHONE TERMINAL

APart

The APart PA-CONF is a high quality chairman microphone terminal that can be used in combination with the APart PA-CONF microphone system. The chairman unit has a solid, yet unobstructive design. The microphone base is equipped with a "SPEECH" and "PRIORITY" button. Pushing the "SPEECH" button activates the microphone and the red led on the base and the red led ring on the microphone will lighten. Pressing the "PRIORITY" button, will mute all delegate microphones that are behind the PA-CONF in the daisy chain. A few Seconds after the "PRIORITY" button has been released, the delegate units (PA-CONF) can be activated again by pushing their "SPEECH" button. The build in limiter improves the intelligibility and prevents big level differences between silent and "shouting" speeches.

The microphone base is equipped with a 3 pin XLR input in which the microphone can be plugged in. Every microphone base has a stereo jack input and output. The delegate units can be connected via daisy chaining. This way, linking the cables to the delegate units is very easy (2 m cables included). The microphone has a high quality Japanese uni-directional condensator microphone capsule. Due to the quality of the microphone, feedback problems in most cases won't occur. It has a sturdy but very elegant and slim stem with a flexible part at the top & bottom. A red LED ring on top of the microphones stem indicates if the microphone is activated.

All these features, together with the unique PA-CONF microphone system, result in a very competitive and versatile system that can be used for mobile use, presentation purposes, debates, meeting rooms (replaces the standard 10 channel microphone mixer) small conference systems and others. Installing this system takes little time and is very easy, even for non-technical people.

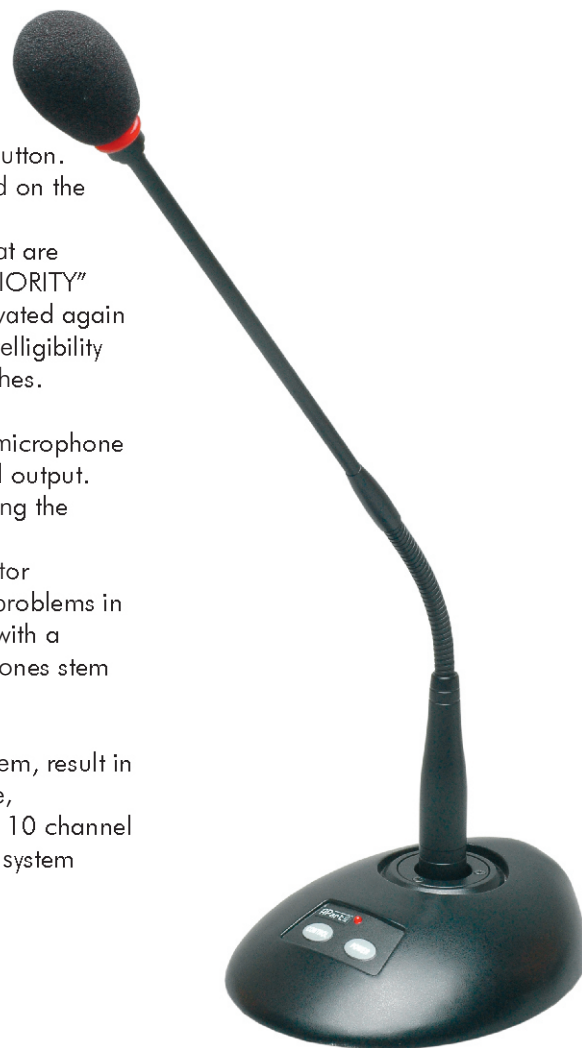

TECHNICAL SPECIFICATIONS

Type	Table type Condensator microphone
Polar pattern	Uni-directional cardioid
Input Base	6.3 mm jack (1: Signal / 2: Conference power / 3: Ground)
Microphone	XLR 3
Output	6.3 mm jack (1: Signal / 2: Conference power / 3: Ground)
Frequency range	150 Hz - 16 kHz (-3dB)
Sensitivity	-68 dB
Limiter	Build in
Light ring	Yes
Cable	6.3mm jack cable, 2 m
Dimensions Base (H x W x D)	40 x 128 x 154 mm
Microphone (L)	470 mm
Weight (base + mic)	1.5 Kg