



ISO 9001 CERTIFIED

DNH^{AS}

Dovoz a distribuce:

AUDIO ZEMAN

Podnikatelská 565, 19011 Praha 9



tel.: +420 - 224 267 163

fax: +420 - 224 267 169


info@audiozeman.cz

www.audiozeman.cz


AQUA-30

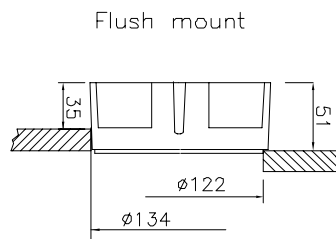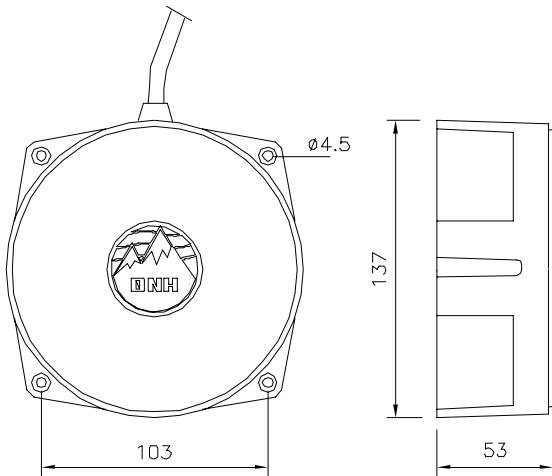

Optional Bracket

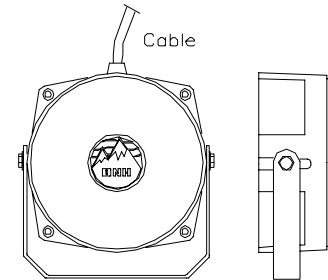

1W/1m Pink Noise 1/3 octave bands 2m below surface.

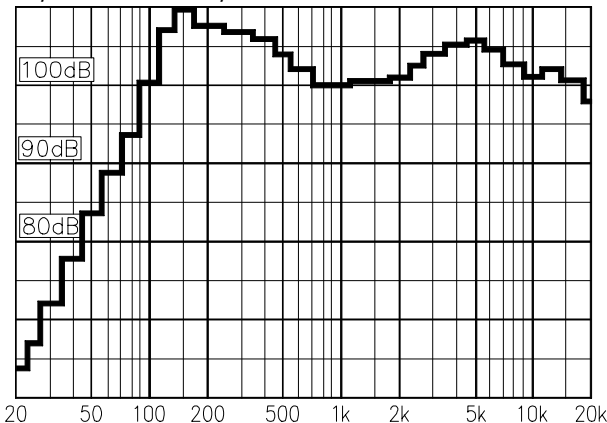

Material / Colour..... ABS / NCS 1070-B, (Blue)
 Mounting 4 screws
 Termination Cable, 5 m
 Weight 2,2 kg
 IP-rating 68
 Max. / min. amb. temp 90°C / -20°C
 Standard version 8Ω
 Rated / max. power 20 W / 30 W
 SPL 1W/1m (submerged) 105 dB
 SPL rated power 118 dB
 Effective freq. Range (submerged)..... 80 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 180° / 180°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- Use 4 screws for mounting on wall, alternative flush mounting.
- When mounting with optional bracket, use the slit on each side to connect the bracket to the loudspeaker.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Cable termination code: Green/yellow: Ground Brown: (+). Blue: (-)
- Please exercise care when installing submerged. This loudspeaker generates very high sound pressures even when driven at low power.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.



DNH reserves the right to alter specifications without notice.

Rev. 29.09.2003