



DNH^{AS}

CAP-15(T)

Dovoz a distribuce:

AUDIO ZEMAN

Podnikatelská 565, 19011 Praha 9



tel.: +420 - 224 267 163

fax: +420 - 224 267 169

info@audiozeman.cz

www.audiozeman.cz

ISO 9001 CERTIFIED

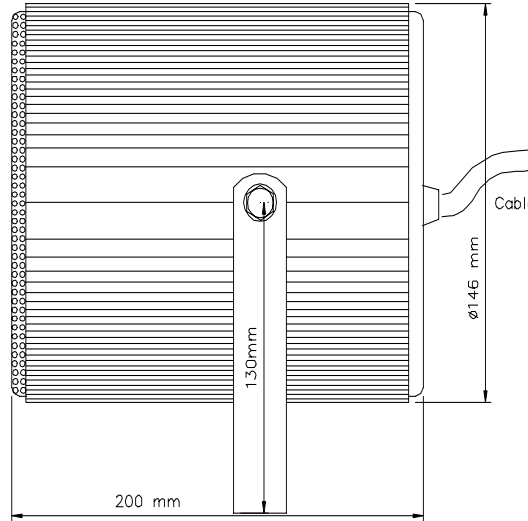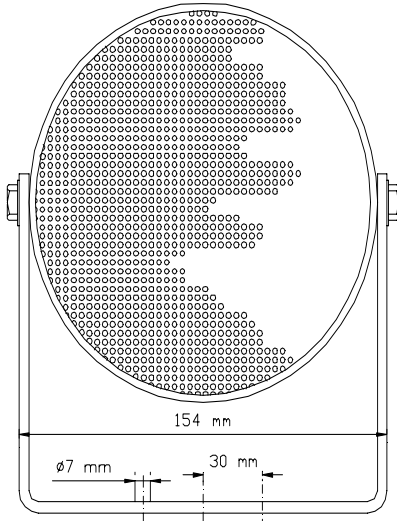


Transformer:
100 Volt line

Prim nominal tapings:

1 : 2	15 W
2 : 3	7,5 W
3 : 4	4,0 W
1 : 3	2,7 W
2 : 4	1,3 W
1 : 4	0,8 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

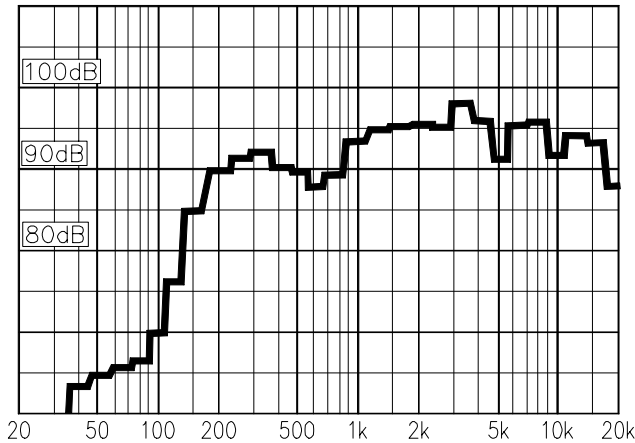

Material / Colour Aluminium / RAL9010 or anodized
 Mounting Bracket
 Termination Cable, 1 m
 Weight 2,1 kg
 IP-rating
 Max. / min. amb. temp 90°C / -40 °C
 Standard version 100 V transformer
 Rated / max. power 15 W / 20 W
 SPL 1W/1m 92 dB
 SPL rated power 103 dB
 Effective freq. range 150 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 130° / 50°
 Directivity factor, Q.....

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.



DNH reserves the right to alter specifications without notice.

Rev. 05.08.2002