



DNH^{AS}

Dovoz a distribuce:

AUDIO ZEMAN

Podnikatelská 565, 19011 Praha 9

tel.: +420 - 224 267 163



fax: +420 - 224 267 169

CAP-15W(T)

info@audiozeman.cz

www.audiozeman.cz

ISO 9001 CERTIFIED

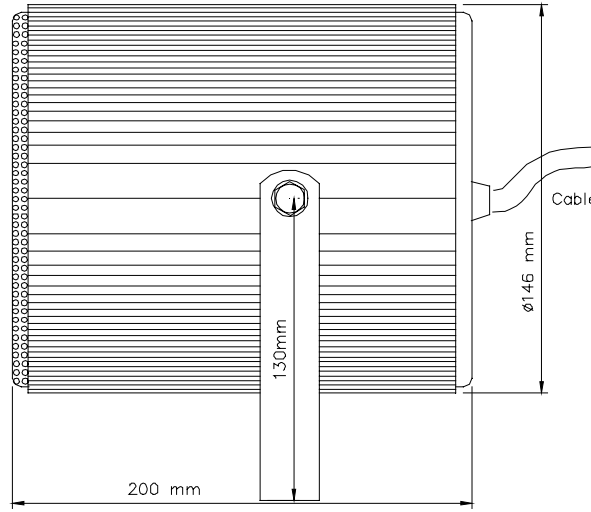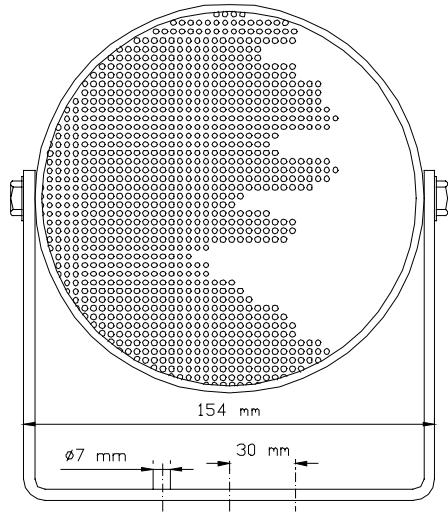


Transformer:
100 Volt line

Primary nominal
tappings:

1 : 2	15 W
2 : 3	7,5 W
3 : 4	4,0 W
1 : 3	2,7 W
2 : 4	1,3 W
1 : 4	0,8 W

1 = Red, 2 = Yellow
3 = Green, 4 = Blue

1W/1m Pink Noise 1/3 octave bands

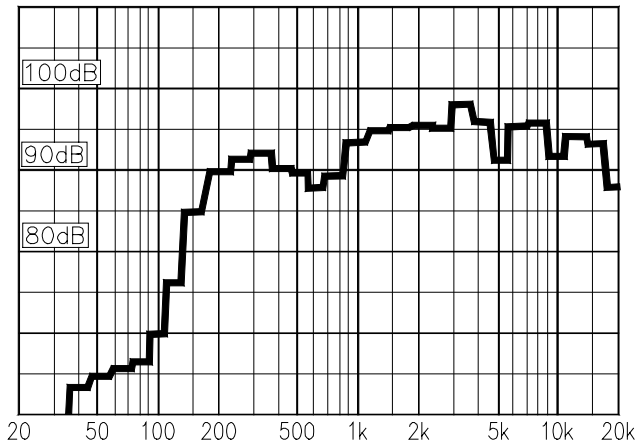

Material / Colour Aluminium / RAL9010 or anodized
 Mounting Bracket
 Termination Cable, 1m
 Weight 2,1 kg
 IP-rating 55
 Max. / min. amb. temp..... 90°C / -40°C
 Standard version 100 V transformer
 Rated / max. power 15 W / 20 W
 SPL 1W/1m 92 dB
 SPL rated power 103 dB
 Effective freq. range 150 – 20000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 130° / 50°
 Directivity factor, Q 15,8

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- It is recommended that the loudspeaker is mounted in such a position so that the front is pointing slightly downwards.
- Tighten the bracket screws on cabinet and make sure that the cable gland is tightened.
- This loudspeaker is supplied with a 2 years warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.

