



# DNH<sup>AS</sup>

## VES-561(T)

Dovoz a distribuce:

### AUDIO ZEMAN

Podnikatelská 565, 19011 Praha 9

tel.: +420 - 224 267 163

fax: +420 - 224 267 169


info@audiozeman.cz

www.audiozeman.cz

ISO 9001 CERTIFIED

cutout diameter 143-147mm

2x M20 knock out  
2x M12 knock out

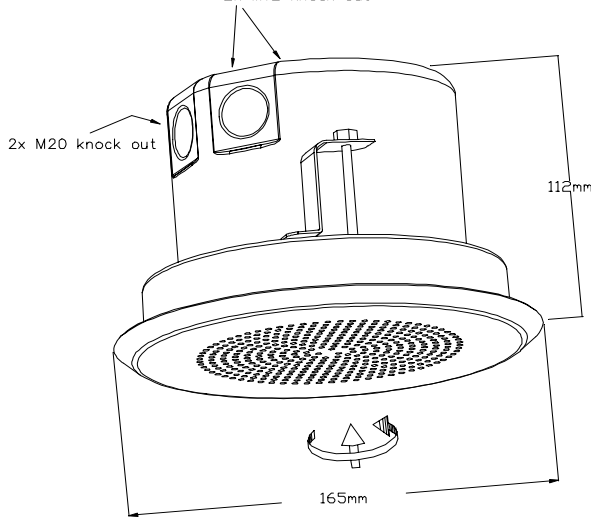

Transformer:


Black : Blue 100 V

Secondary nominal  
tappings:

common : 4	6,0 W
common : 3	3,0 W
common : 2	1,5 W
Common : 1	0.5 W

Acc. British Standard 5839

1W/1m Pink Noise 1/3 octave bands

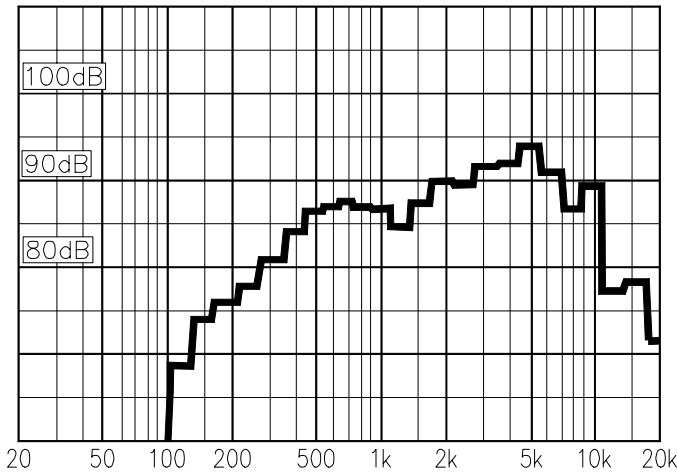

Material / Colour .....Steel / White  
 Mounting .....3 screws  
 Termination ..... Ceramic terminals  
 Weight ..... 1,1 kg  
 IP-rating .....  
 Max. / min. amb. temp ..... 120°C / -20°C  
 Standard version ..... 100 V transformer  
 Rated / max. power .....6 W / 8 W  
 SPL 1W/1m ..... 90 dB  
 SPL rated power ..... 97 dB  
 Effective freq. range ..... 200 – 12000 Hz  
 Dispersion (-6dB) 1kHz / 4kHz ..... 185° / 80°  
 Directivity factor, Q .....

### Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Install box by turning 3 screws clockwise and the 3 hooks will keep loudspeaker in position. Connect cable to terminal and screw loudspeaker grill clockwise into fixed position.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- If required; Earthing package is included in master carton.
- Do not open loudspeaker when energized.
- This loudspeaker can also be fitted with a plastic grille, VES-561p(T).
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

Most of our products are available in different colours, impedances and power ratings.



DNH reserves the right to alter specifications without notice.

Rev. 15.03.2004