


WA 06-165/T Metall



Technical Specifications:

Type:	WA 06-165/T Metall
Power:	6/3/1,5 W
Frequency Range:	200-17.400 Hz
<u>SPL 1W/1m:</u>	95,6 dB
<u>SPL Pmax/1m:</u>	106,5 dB
Dimensions:	257x192x80 mm
Temperature range:	-20 / +80 °C °C
Dispersion angle (-10dB):	180° (H) / 180° (V)
Weight:	2,40 kg
Packing Unit:	8
Protection Class:	
Fire Protection (DIN4102):	
Mounting:	Screws
Connector:	
Colour:	RAL 9010

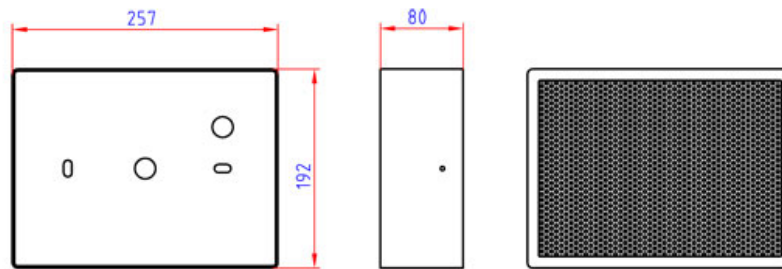


Product Attributes:




WA 06-165/T Metall

Frequency Diagrams:



Sound Pressure Level

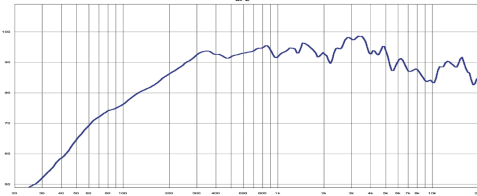

Impedance

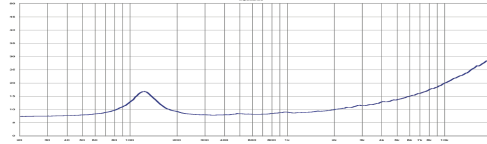

Polar Diagrams (H)

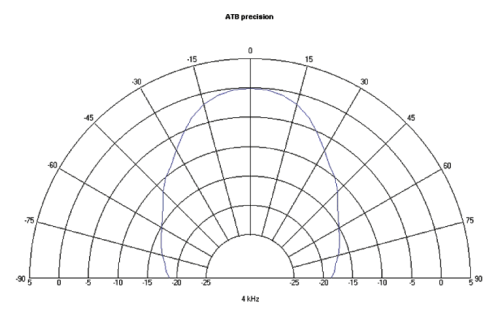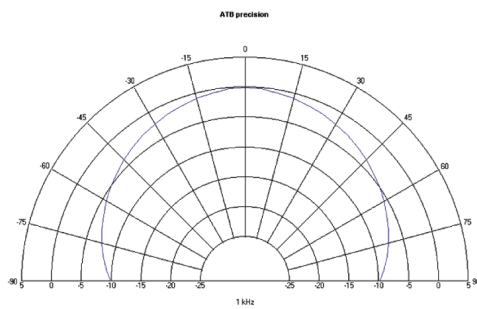



ic audio GmbH • Boehringerstraße 14a • D-68307 Mannheim • Germany
Fon: ++49 (0) 621 / 77096 -0 • Fax: ++49 (0) 621 / 77096 -26 • Email: info@ic-audio.com

WA 06-165/T Metall

Frequency Diagrams:

Measurements according to DIN IEC 268-5

ic audio GmbH • Boehringerstraße 14a • D-68307 Mannheim • Germany
Fon: ++49 (0) 621 / 77096 -0 • Fax: ++49 (0) 621 / 77096 -26 • Email: info@ic-audio.com